


Segment 1 - Kelley St. to Bennington Dr. & Segment 3 - Tidwell Rd. to IH-69

Existing Conditions	Identified Needs	Future Vision
• 0.6-mile undivided roadway • Four travel lanes with no median • Inconsistent buffers • Missing and discontinuous sidewalks	• Safer roadway with landscaped median • Improved walking and biking connections • Enhanced safety and accessibility for all users • Upgraded bus shelters and sidewalks	Proposed Roadway: • Two 11-foot vehicle lanes in each direction. • 15-foot landscaped raised median. • 6-foot buffer on each side. • 6-foot multi-use path on both sides

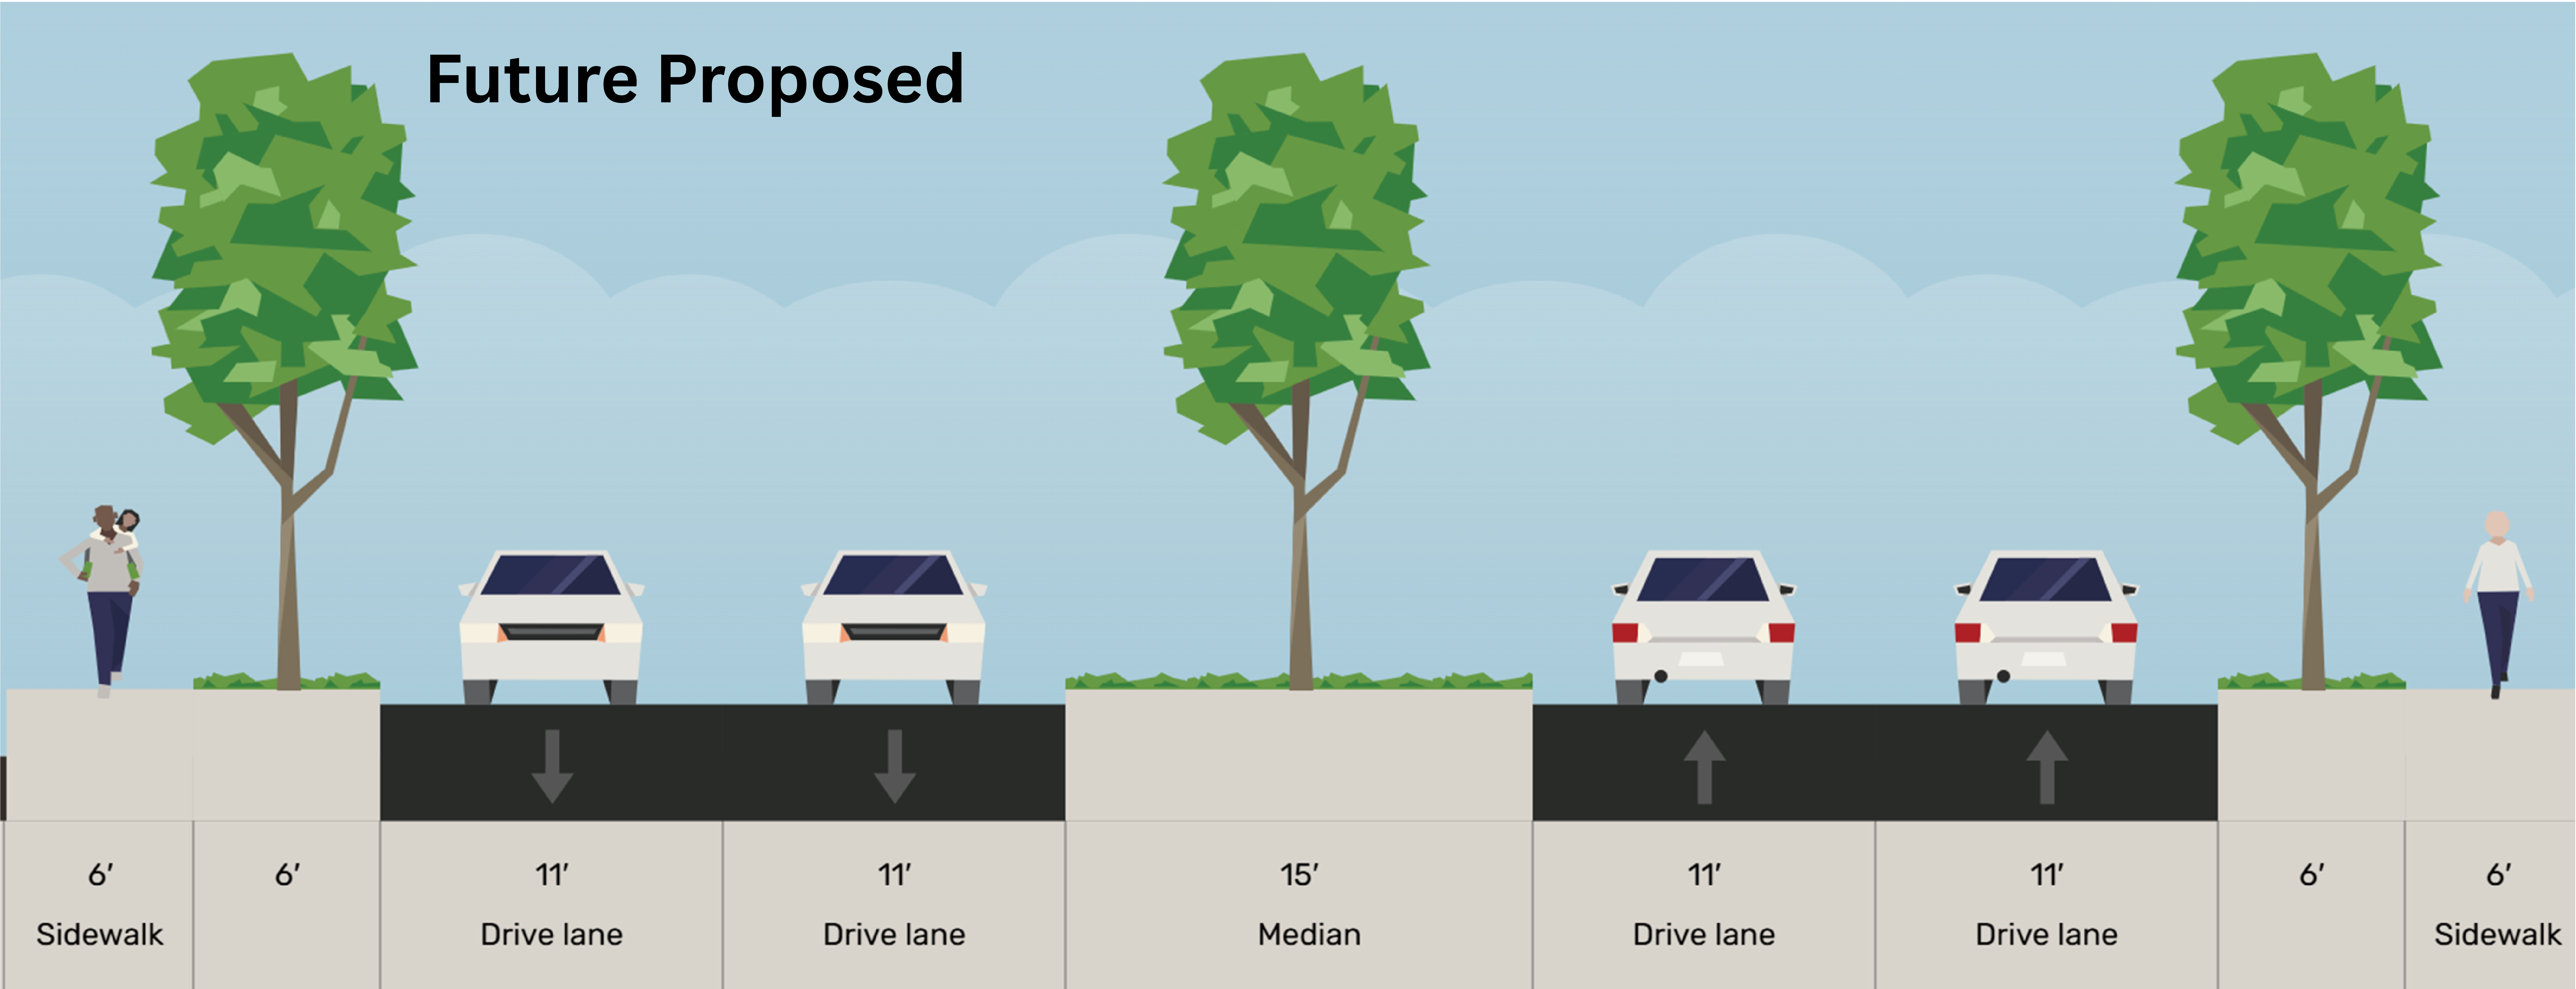

Segment 2 - Bennington Dr. to Tidwell Rd.

Existing Conditions	Identified Needs	Future Vision
• Inconsistent roadway design • Varies between four lanes, median, and center turn lane sections • Irregular buffers throughout corridor • Missing and inconsistent sidewalks	• Continuous center turn lane for access and mobility • Improved walking and biking connections • Enhanced traffic capacity • Upgraded bus stops and shelters	Proposed Roadway: • Two 11-foot vehicle lanes in each direction. • 14-foot center turn lane. • 6-foot buffer on each side. • 6-foot multi-use path on both sides

